


SUPRA 189.3cm (75 inch) 8GB/128GB

FEATURES

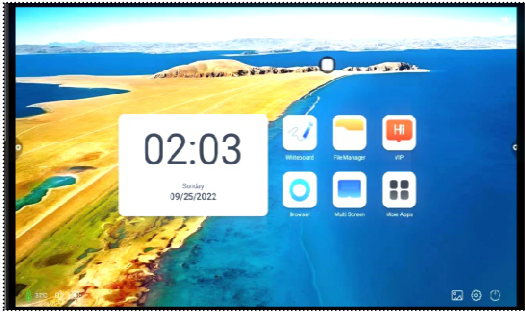

android 14

- Ultra Resolution Output.
- Zero bonding technology for natural writing experience.
- Front audio stereophonic speakers.
- Industrial grade aluminum frame.
- Multiple signal input HDMI, SPDIF, RS232, AV I/O, Earphone.
- Infrared touch technology for rich writing experience.
- Password Lock protected.
- 400cd/m² ±5% high brightness.
- Built in Android OS with optional windows OS.
- 4mm protect and anti-scratch glass.
- 20 Point Touch. ≤5ms response.



Zero Bonding Technology



Type-C Port



2 x 20W Speakers



400 nits Brightness



Screen Recorder



9 MOHS Toughened Glass



60000+ Hours Screen Life



Anti Glare Screen



Bluetooth Connectivity



1mm Writing Height



4K UHD Resolution



App & Tool Lock Feature



Reverse Screen Mirroring

TECHNICAL SPECIFICATION

Model No. T291143-A

DISPLAY

Diagonal Size	189.3cm (75 inch)
Bonding Technology	Zero Bonding
Display Orientation	Landscape
Screen Type	TFT LCD(Direct-LED Backlight)
Aspect Ratio	16:9
Pixel Pitch	0.4296 (H) X 0.4296 (W)
Response	≤8ms
Resolution	3840 x 2160 pixels
Contrast Ratio	5000:1 Dynamic, 1200:1 Static
Brightness(cd/m ²)	400cd/m ² ±5%
Display Area	1652mm(H) x 930mm(V) (65 x 36.5 in)
Color	16.7 million colors
View Angle	H:178° V:178°
LED Lifespan	60,000* hours

System

OS	Android 14
CPU	Quad Core Cortex-A37, 1.4 GHz
Chipset	Pro-9679
GPU	Mali-G52 MP2 (2EE)
RAM	8GB
Storage	128GB
OSD Language	English
Video Format	PAN, NTSC
Optimum Resolution	3840 x 2160 pixels @ 60 HZ

Video Decoding	<ul style="list-style-type: none"> - AVS2 MP-10@L8.2, 4Kx2K@60fps - ITU-TH.265 Main 10Profile@Level 5.1 High-tier, 4Kx2K@60fps - VP9 Profile 2 10-bit, 4Kx2K@60fps - SHVC, ATSC 3.0(For H.265) - FHD HFR(For H.265) - H.264 AVC HP@L5.1 up to 4Kx2K@30fps - H.264 MVC up to 1080P@60fps - MPEG-1 MP/HL up to 1080P@60fps (ISO-11172) - MPEG-2 SP@ML,MP@HL, up to 1080P@60fps (ISO-13818) -SuperClear, smooth edge -Support 3D detection -Support 2D to 3D -Support 0D/1D/2D Local Dimming -Support Ambi-Light -Support video rotation - AVS2 MP up to 4Kx2K@60fps - MPEG-4 ASP@L5 up to 1080P@60fps (ISO-14496) - WMV/VC-1 SP/MP/AP up to 1080P@60fps - AVS-P16(AVS+) /AVS-P2 JiZhun Profile up to 1080P@60fps - Multiple language and multiple format sub-title video support - MJPEG and JPEG unlimited pixel resolution decoding (ISO/IEC-10918) - Supports JPEG thumbnail, scaling, rotation and transition effects - Supports *.mkv,*.wmv,*.mpg,*.mpeg,*.dat,*.avi,*.mov,*.iso,*.mp4 and *.jpg file formats
Picture Decoding	<ul style="list-style-type: none"> - Independent JPEG and H.264 encoder with configurable performance/bit-rate - JPEG image encoding - H.264 video encoding up to 1080P@30fps with low latency
Support Resolution	3840x2160, 1920x1080, 1680x1050, 1600x1200, 1440x1050, 1360x768,
Video Format	480i, 480p, 576i, 576p, 720p, 1080i, 1080p, 4K
I/O Port	
Rear Input	HDMI2.0 x 2, USB3.0 x 1, USB2.0 x 2, SPDIF x 1, RS232 x 1, Touch USB x 1, Rj45 Line in/Mic in(3.5mm) x 1, Line Out/Earphone(3.5mm) x 1.
Front Input	USB 3.0 x 3 (Both work on Android and OPS) , HDMI2.0 x 1, Touch USB x 1, Type-C x 1, Light Sensor x 1
Media Format	
Audio	MP3, WMA, WAV, APE, FLAC, AAC, OGG, M4A,3GPP
Video	H.264,VP8, RV, WMV, AVS, H.263, MPEG4
Picture	JPG, BMP, PNG
Touch Features	
Touch Type	Infra-red Touch, 20 Point Touch (Android), 40 Points (Windows)
Glass Hardness	9H (Pencil), 7 (Mohs)
Glass Type	4mm Mohs, Heat Tempered Glass, Explosion Proof, Anti Glare, etc
Response Time	≤5ms
Touch Object	All Opaque objects, such as Finger, Stylus Pen etc.
Touch Resolution	32768 x 32768 pixels

Touch Accuracy	1mm
Tracking Rate	4m/s
Scan Rate	200Hz
MTF	60million touch by each points
Minimum Touch Object	≥1MM
Essential Apps	Including Whiteboard, Annotate, Timer, Calculator, Split Screen, Record, Spinner, Screen Capture, Screen Record, Screen Share, Browser, PDF reader, Media Player, Screen Cast, etc.
Compatibility	Chrome OS

Audio

Speaker	2 x 20W
---------	---------

Panel Management (Optional)

OTA	Yes
DMS (Device Management System)	<ul style="list-style-type: none"> • Display Product information (Like Location, IP,MAC, Operation System version, Specification etc.) • User management • Device management(Power on/off, Screen Lock, Sent Message, Program work flow, • Running log • Group management
Own APK Store Market	Manage private APK store market

Physical Specifications

Handel	2
Panel Net Weight (Kg)	46 KG
Packed Weight (Kg)	54 KG
Panel Dimensions	1706mm x 1012.1mm x 115.9mm (W x H x D) (without Wall Mounting Bracket or Floor Stand)
Packed Dimensions	1825mm x 215mm x 1120mm
VESA Mount Point mm	600 x 400

Power

Power Requirements	AC 100 ~ 240V AC, 60/50Hz
Energy Star Power Consumption	Normal ≤250W
Power Consumptions (standby)	≤ 0.5W
Ultra-Quiet Fanless Design	Yes

Environmental

Operating Temperature	0°C to 40°C(32°F to 104°F)
Storage Temperature	-15° to 55°C(-5°F to 131°F)
Operating Humidity	20% to 80% non-condensing humidity
Storage Humidity	20% to 90% non-condensing humidity

Packed Contents


Kit 1 x AiO ADPM , 1 x Remote Controller, 1 x Wall Mount Bracket,
2 x Stylus, 1 x Power Cable.

Other

Option Floor Stand Bracket

Certification BIS, CE, FCC, RoHS

Dimension

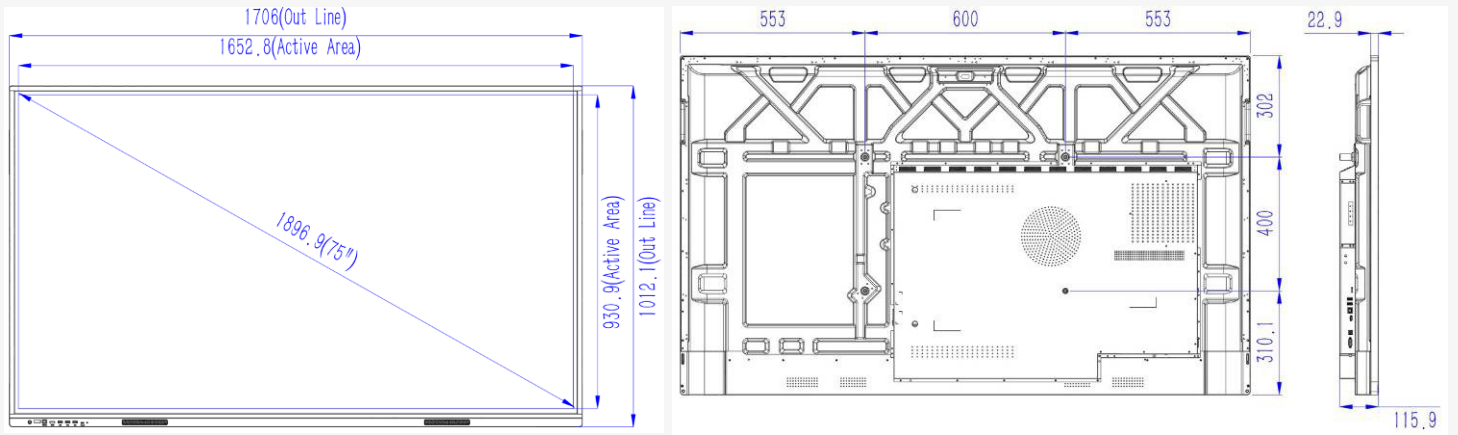

(Unit:mm)

Additional Accessories (Optional)

OPS ADPM

CPU	Option : Core i3 / Core i5 / Core i7
RAM	Option : 4GB, 8GB, 16GB
Hard Disk	SSD 128GB~2TB or HDD 500GB~4TB
I/O Port	USB2.0X2, USB3.0X2, MICX1, LINE OUTX1, RJ45X1, VGAX1, HDMIX1

* **Note:** Product specifications are subject to change without prior notice.